


## TECHNICAL SPECIFICATIONS


Filter Media	Synthetic Polyester
Frame Material	Galvanized Sheet Metal
Frame Thickness	20-25 mm
Classification (EN779:2012)	F7 – F8
Classification (ISO 16890)	ePM10 2.5/ ePM1
Final Pressure Drop	250 Pa
Max. Temperature	80°C
Max. Humidity	90%
Rated Face Velocity	2,70 m/s



PRODUCT CODE	CLASS EN779:2012	CLASS ISO16890	WIDTH (mm)	HEIGHT (mm)	DEPTH (mm)	UMBER OF POCKETS	FILTRATION AREA (m²)	NOMINAL AIR FLOW (m³/h)	INITIAL PRESSURE DROP (± 10 % Pa)	Weight Kg
FB-F7-4C-01	F7	ePM2.5 65%	287	592	360	4	1,70	1700	95	1,1
FB-F7-6C-01	F7	ePM2.5 65%	490	592	360	6	2,50	2800	95	1,5
FB-F7-8C-01	F7	ePM2.5 65%	592	592	360	8	3,40	3400	95	2
FB-F7-4C-02	F7	ePM2.5 65%	287	592	535	4	2,50	1700	85	1,2
FB-F7-6C-02	F7	ePM2.5 65%	490	592	535	6	3,80	2800	85	1,8
FB-F7-8C-02	F7	ePM2.5 65%	592	592	535	8	5,00	3400	85	2,4
FB-F74C-03	F7	ePM2.5 65%	287	592	635	4	3,00	1700	70	1,2
FB-F7-6C-03	F7	ePM2.5 65%	490	592	635	6	4,50	2800	70	1,9
FB-F7-8C-03	F7	ePM2.5 65%	592	592	635	8	6,00	3400	70	2,8
FB-F8-4C-01	F8	ePM1 75%	287	592	360	4	1,70	1700	115	1,1
FB-F8-6C-01	F8	ePM1 75%	490	592	360	6	2,50	2800	115	1,5
FB-F8-8C-01	F8	ePM1 75%	592	592	360	8	3,40	3400	115	2
FB-F8-4C-02	F8	ePM1 75%	287	592	535	4	2,50	1700	95	1,2
FB-F8-6C-02	F8	ePM1 75%	490	592	535	6	3,80	2800	95	1,8
FB-F8-8C-02	F8	ePM1 75%	592	592	535	8	5,00	3400	95	2,4
FB-F84C-03	F8	ePM1 75%	287	592	635	4	3,00	1700	85	1,2
FB-F8-6C-03	F8	ePM1 75%	490	592	635	6	4,50	2800	85	1,9
FB-F8-8C-03	F8	ePM1 75%	592	592	635	8	6,00	3400	85	2,8

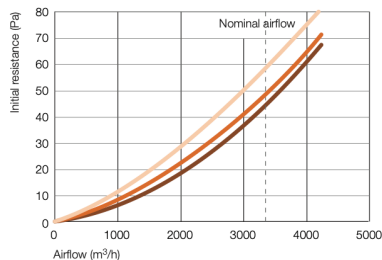

ePM10 60% 592x592x360/ 6 pockets  
ePM10 60% 592x592x525/ 6 pockets  
ePM10 60% 592x592x635/ 6 pockets

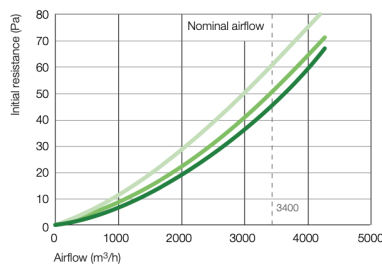

ePM10 60% 592x592x360/ 8 pockets  
ePM10 60% 592x592x525/ 8 pockets  
ePM10 60% 592x592x635/ 8 pockets