

# F9 POCKET FILTER




## TECHNICAL SPECIFICATIONS

Filter Media	Synthetic Polyester
Frame Material	Galvanized Sheet Metal
Frame Thickness	20-25 mm
Classification (EN779:2012)	F9
Classification (ISO 16890)	ePM1 90%
Final Pressure Drop	450 Pa
Max. Temperature	80°C
Max. Humidity	90%
Rated Face Velocity	2,70 m/s



PRODUCT CODE	CLASS EN779:2012	CLASS ISO16890	WIDTH (mm)	HEIGHT (mm)	DEPTH (mm)	UMBER OF POCKETS	FILTRATION AREA (m <sup>2</sup> )	NOMINAL AIR FLOW (m <sup>3</sup> /h)	INITIAL PRESSURE DROP (± 10 % Pa)	Weight (Kg)
FB-F9-4C-01	F9	ePM1 90%	287	592	360	4	1,70	1700	105	1,1
FB-F9-6C-01	F9	ePM1 90%	490	592	360	6	2,50	2800	105	1,5
FB-F9-8C-01	F9	ePM1 90%	592	592	360	8	3,40	3400	105	2
FB-F9-4C-02	F9	ePM1 90%	287	592	535	4	2,50	1700	90	1,2
FB-F9-6C-02	F9	ePM1 90%	490	592	535	6	3,80	2800	90	1,8
FB-F9-8C-02	F9	ePM1 90%	592	592	535	8	5,00	3400	90	2,4
FB-F9-4C-03	F9	ePM1 90%	287	592	635	4	3,00	1700	85	1,2
FB-F9-6C-03	F9	ePM1 90%	490	592	635	6	4,50	2800	85	1,9
FB-F9-8C-03	F9	ePM1 90%	592	592	635	8	6,00	3400	85	2,8

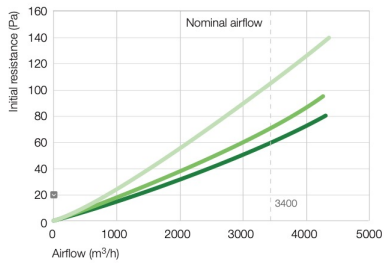

ePM10 60% 592x592x360/ 8 pockets  
 ePM10 60% 592x592x525/ 8 pockets  
 ePM10 60% 592x592x635/ 8 pockets