


MINIPLEAT FILTER - GALVANIZED



➤ TECHNICAL SPECIFICATIONS

Filter Media	Minipleat Micro Glass Fibre
Frame Material	Galvanized Sheet Metal
Classification (EN1822)	M5 – F9
Classification (ISO 16890)	ePM10 – ePM2.5 – ePM1
Gasket	Optional (Polyurethane/Epdm)
Seperator	Hot-melt
Sealant	2K Polyurethane
Final Pressure Drop	450 Pa
Max. Temperature	70°C
Max. Humidity	90%

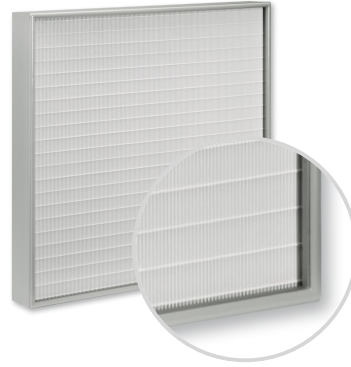

PRODUCT CODE	CLASS EN1822	CLASS ISO16890	WIDTH (mm)	HEIGHT (mm)	DEPTH (mm)	NOMINAL AIR FLOW (m ³ /h)	INITIAL PRESSURE DROP (± 10 % Pa)	Weight Kg
FMP-M5-01	M5	ePM10 60%	287	287	48	500	50	1,5
FMP-M5-02	M5	ePM10 60%	287	592	48	1000	50	2
FMP-M5-03	M5	ePM10 60%	490	592	48	1650	50	2,5
FMP-M5-04	M5	ePM10 60%	592	592	48	2000	50	3
FMP-M5-05	M5	ePM10 60%	287	287	96	750	60	2
FMP-M5-06	M5	ePM10 60%	287	592	96	1500	60	2,7
FMP-M5-07	M5	ePM10 60%	490	592	96	2500	60	3,3
FMP-M5-08	M5	ePM10 60%	592	592	96	3000	60	4
FMP-F7-01	F7	ePM1 60%	287	287	48	500	80	1,5
FMP-F7-02	F7	ePM1 60%	287	592	48	1000	80	2
FMP-F7-03	F7	ePM1 60%	490	592	48	1650	80	2,5
FMP-F7-04	F7	ePM1 60%	592	592	48	2000	80	3
FMP-F7-05	F7	ePM1 60%	287	287	96	750	90	2
FMP-F7-06	F7	ePM1 60%	287	592	96	1500	90	2,7
FMP-F7-07	F7	ePM1 60%	490	592	96	2500	90	3,3
FMP-F7-08	F7	ePM1 60%	592	592	96	3000	90	4
FMP-F9-01	F9	ePM1 85%	287	287	48	500	140	1,5
FMP-F9-02	F9	ePM1 85%	287	592	48	1000	140	2
FMP-F9-03	F9	ePM1 85%	490	592	48	1650	140	2,5
FMP-F9-04	F9	ePM1 85%	592	592	48	2000	140	3
FMP-F9-05	F9	ePM1 85%	287	287	96	750	150	2
FMP-F9-06	F9	ePM1 85%	287	592	96	1500	150	2,7
FMP-F9-07	F9	ePM1 85%	490	592	96	2500	150	3,3
FMP-F9-08	F9	ePM1 85%	592	592	96	3000	150	4